

NOTES

MECHANICAL:


1. HOUSING MATERIAL: PBT BLACK UL94V-0
2. CONTACT MATERIAL: PHOSPHOR BRONZE T=0.35mm.
3. PLATING: GOLD PLATING AT CONTACT AREA, NICKEL 30u" MIN. OVER ALL
4. SHIELD: BRASS T=0.20mm PLATED NICKEL 30u" Min .
5. OPERATING LIFE: 750 CYCLES MIN.
6. MATTING/UNMATTING FORCE: 30N/3.06KGf MAX
7. RETENTION STRENGTH: 50N MIN. FOR 60S  $\pm 55$

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE : 30m  $\Omega$  MAX.
4. INSULATION RESISTANCE: 1000M  $\Omega$  MIN. AT 500V DC .
5. DIELECTRIC STRENGTH: 1000V AC OR 1500V DC RMS AT 0.5mA 50Hz/60Hz FOR 1MINUTE.

ENVIRONMENTAL:

1. STORAGE: -40°C TO +85°C RELATIVE HUMIDITY<80%.
2. OPERATION: -40°C TO +85°C.

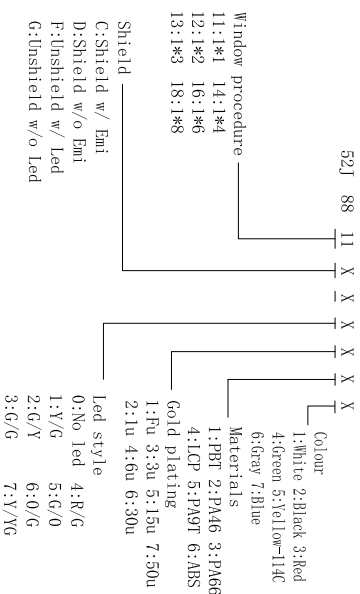

DONG GUAN SHI QIAN YI ELECTRONIC CO.,LTD

Title 8P8C 屏蔽 无灯 有耳 PBT料 红色胶芯

P0 NO. 52J8811A30412

DATE	ECN NO.	SPEC	DESIGNER	AUDITOR	SIZE	A4	Angles $\pm 1^\circ$
			Designer		ZMX		Tolerances (mm)
			Auditor		ZL		0.0 $\pm 0.25$
			Authorizer		ZL		0.00 $\pm 0.20$
			SCALE		1:1		0.000 $\pm 0.1$

